





2009-09  
**EXTRACTION PUMP  
OIL & DIESEL**



**AUTOVAC 56**  
PART NO 317-56  
FOR MULTI POINT USE

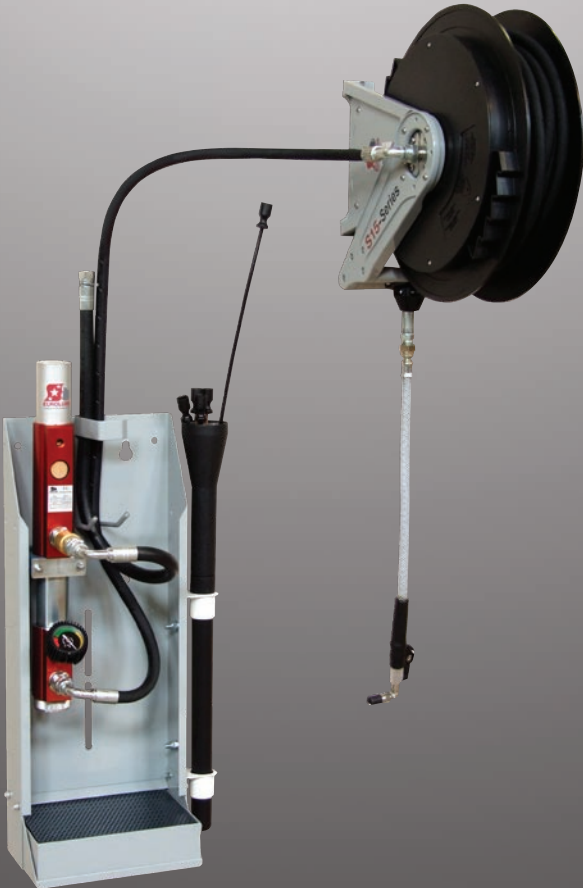

**AUTOVAC 55**  
PART NO 317-55  
FOR SINGLE POINT USE

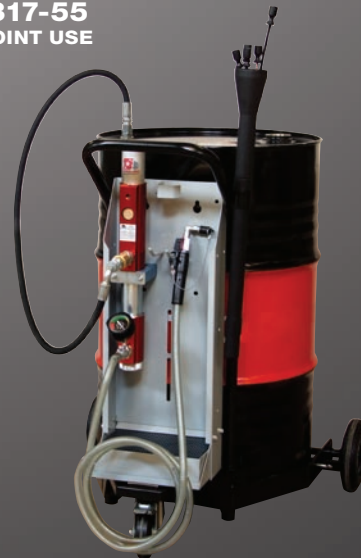

**AUTOVAC 57**  
PART NO 317-57  
MOBILE UNIT FOR AUTOMOTIVE  
INDUSTRY & MARINE

## **EXTRACTION PUMP FOR OIL & DIESEL**

- FLOW RATE - UP TO 15 L / MINUTE
- OUTSTANDING PERFORMANCE - UP TO 95% VACUUM
- AUTOMOTIVE - FOR FAST AND CLEAN OIL CHANGE
- INDUSTRY - IDEAL FOR DRAINING SMALLER TANKS ETC.
- MARINE - THE IDEAL SOLUTION TO EXTRACT OIL & DIESEL


## OUTSTANDING PERFORMANCE - FOR SAFE, CLEAN & EFFICIENT SERVICE

Single point use



**AUTOVAC 55**  
PART NO 317-55

Covers up to 3 work bays

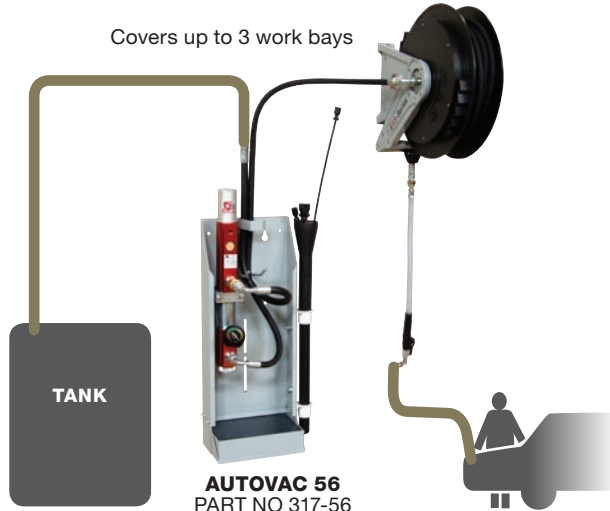

**AUTOVAC 56**  
PART NO 317-56

Mobile unit for Automotive Industry & Marine



**AUTOVAC 57**  
PART NO 317-57

Pump only



**PART NO B11745**

### FOR THE AUTOMOTIVE, INDUSTRY & MARINE

Eurolube introduces an efficient and reliable extraction pump for oil & diesel:

- It is our philosophy to constantly anticipate our customer's needs and improve what is good, to optimize and enhance our product range time and time again.
- Backed by Eurolube's reputation for long lasting products, the package is designed to outperform other extraction pumps in their class and provide customers with the very latest functionality and exceptional easy handling.
- Whether you need to move oil from engines or tanks, we can customize for your extraction demanding applications within automotive, industry or marine sectors.
- The pump is designed to deliver maximum vacuum, up to 95% (#).
- The suction tube is equipped with a large strainer and vacuum meter to indicate that the fluid has been emptied.
- All models include connectors and probes for efficient extraction.

#### AUTOMOTIVE

- Model 317-55 is for one work bay in smaller workshops, extracted fluid can be collected directly to a drum for later disposal.
- Model 317-56 can cover up to 3 work bays, extracted fluid can be collected to a central storage tank for later disposal.

#### AUTOMOTIVE INDUSTRY & MARINE



- The mobile unit is ideal to extract oil or diesel from engines and tanks directly to a 200l drum for later disposal (drum not included).

#### TECHNICAL DATA

Min. air pressure	3 bar
Max. air pressure	7 bar
Recommended air pressure	4-5 bar
Max. vacuum	-0,95 bar (#)
Max. temperature	+95°C
Capacity, free flow	15 l / minute
Capacity with probes	2-10 l / minute #)

#) Engine oil at minimum +70°C, see details in service manual

#### DUAL FUNCTION:



**LARGE VACUUM METER**



- LARGE 32 MESH STRAINER
- A DRIP TRAY ELIMINATES THE MESS WHEN CLEANING THE FILTER



For more information about our complete product range, visit our website, [www.eurolube.com](http://www.eurolube.com)



## EUROLUBE EQUIPMENT AB

Box 36, SE-711 21 Lindesberg, Sweden

EMAIL [eurolube@eurolube.com](mailto:eurolube@eurolube.com) PHONE +46 581 836 65 FAX +46 581 409 75